Mine Anemometer APR-2m

Provides air current parametrization in mines and pits in 3 modes-manual, automatic and remote. In all three states the anemometer provides depression survey and automatic monitoring of a ventilation system in full measure.

Anemometer's APR-2m Advantages

- Indication presence of measurement time duration, speed indications, pressure and temperatures air stream on the display.
- Interface and special computer programs allow to print of the executed measurement with number, date and time of their achievement
- Speed sensor and which a telescopic boom are put away in non-working condition into the device case provides its reliable protection. Speed sensor can be replaced personally by the user if necessary.

You will know everything about air current!




Technical characteristics

Measuring range:	
- Speed, m/s	0.1 - 50.0
- Pressure, mm H_2O	8500 - 11700
- Temperature, ^O C	from -20 till +70
Power supply source	Type A316
Duration of continuous running without battery change, not less, hours	1200
Protection level of external environment impact	IP 54
Explosion proof level and type	PO ExiaI X
Operating live, not less, year	8
Overall dimension, mm	310 x 70 x 55
Mass, kg	0.52

Developer and manufacturer: EkoTech LLC

Phone: +7(495) 558-82-08; +7(905) 736-86-52 E-mail: m_aa37@mail.ru www.anemometr-apr2m.ru

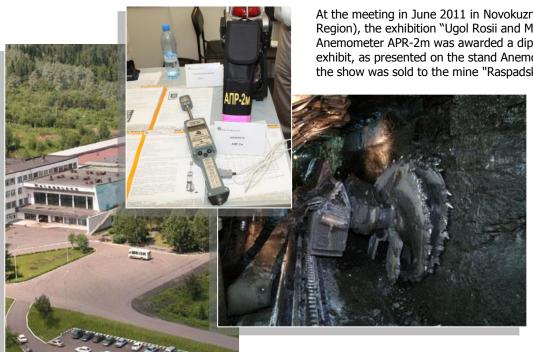

At the meeting in June 2011 in Novokuznetsk (Kemerovo Region), the exhibition "Ugol Rosii and Mining" mine Anemometer APR-2m was awarded a diploma as the best exhibit, as presented on the stand Anemometer directly from the show was sold to the mine "Raspadskaya".